

general specification

Diese Information ist lediglich eine technische Beschreibung des Produktes. Sie stellt keine Beschaffenheits- oder Haltbarkeitsgarantie im Sinne des Paragraphen 443 BGB dar.
This information is exclusively a technical description of the products. It is not meant or intends to be a special guarantee for a particular quality or durability with regard to section 443 BGB (German Civil Code).

NUR FÜR INTERNEN GEBRAUCH

Informationskopie !
 Wird bei Änderung nicht ausgetauscht
for Information only !


Document Name: Engine Management System

Project: MSD87-6

Engineering Change Number:

Version: 28.0 (Draft)

Release Date: 2008-02-27

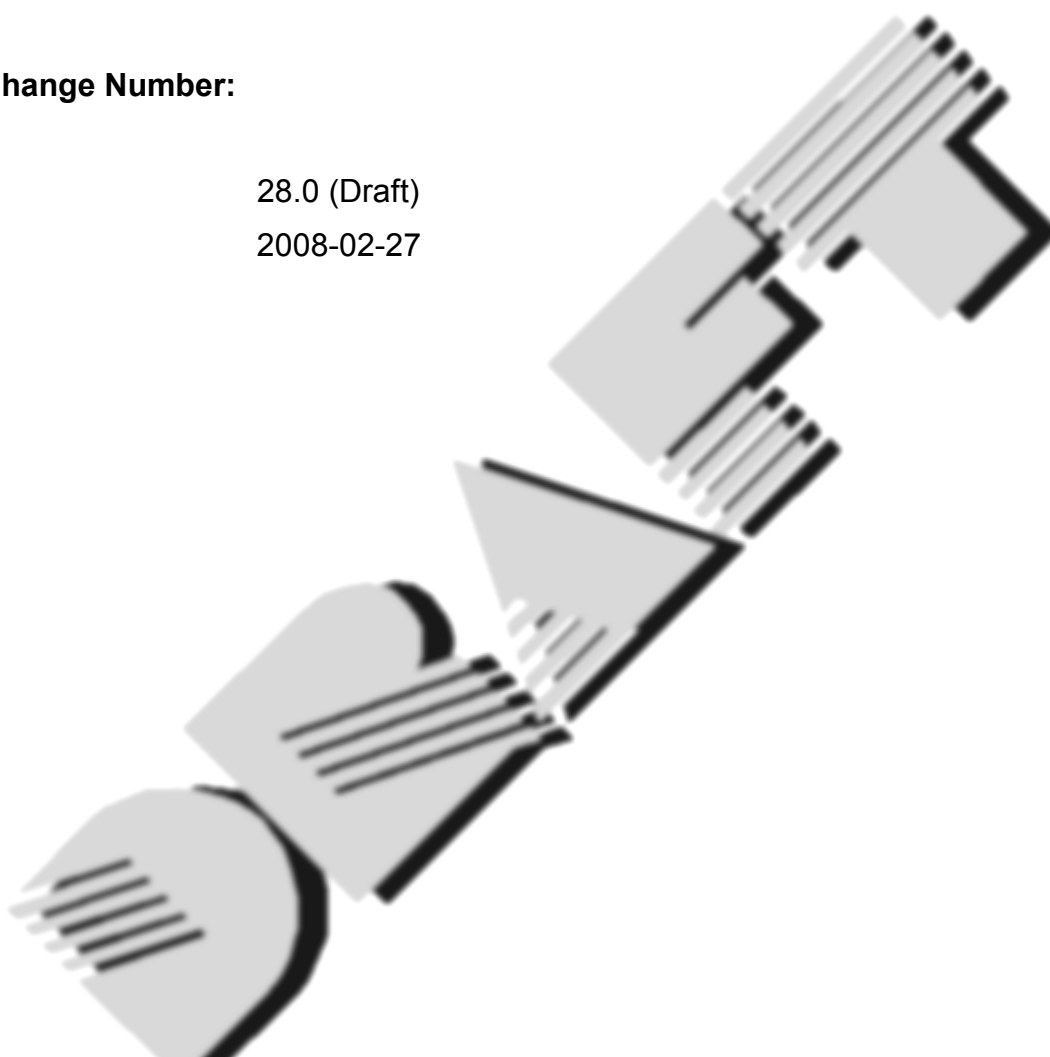

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.


Chapter Contents of All Chapters		Baseline 9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation Engine Management System MSD87-6		
	Document Key	E150.035.49.01 SPE 000 28.0 (Draft)	
			Pages 1 of 10080
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

Version history


Document version	Previous version	Change description (including number)
28.0		ECM

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
			Sign
		Date	2008-02-27
		Department	SV P GS Sys ES
		Designation	
		Engine Management System MSD87-6	
		Document Key	E150.035.49.01 SPE 000 28.0 (Draft)
		Pages	2 of 10080
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

1	Air temperature	148
1.1	AIRT – Requirements to infrastructure interface	160
1.2	AGGR AIRT adaptation	162
1.2.1	Function Description	162
1.2.1.1	Calculation at reset	162
1.2.1.2	Calculations at Engine stop to engine run	163
1.2.1.3	Formula section	163
1.3	TIA_THR_UP, TIA_TMP and TAM temperatures	164
1.3.1	Initialisation - Overview	169
1.3.1.1	Initialisation at Reset - Overview	170
1.3.1.1.1	Initialisation at Reset - 1	170
1.3.1.1.2	Initialisation at Reset - 2	170
1.3.1.2	NVMY data handling	171
1.3.2	Formula Section	171
1.3.2.1	OPM_1S - Calculation of variables related to TAM	172
1.3.2.1.1	Calculation for Ambient-air temperature model	172
1.3.2.1.1.1	1st Ambient-air-temperature model - TAM_MDL_1	172
1.3.2.1.1.2	2nd Ambient-air-temperature model - TAM_MDL_2	173
1.3.2.1.1.2.1	Stability check for TAM_TMP	173
1.3.2.1.1.2.2	Vehicle/Engine conditions stability check	174
1.3.2.1.1.2.3	Calculation of basis variables for 2nd TAM model	175
1.3.2.1.1.2.4	Conditions to learn a new TAM model value	177
1.3.2.1.1.2.5	Update of TAM model value	177
1.3.2.1.2	Final calculation of TAM_MDL_CLC and TAM	179
1.3.2.1.2.1	Calculation of the Ambient-air-temperature for all ECU-functions	179
1.3.2.2	OPM_100MS - Calculation of TIA related variables	180
1.4	Ambient Air Temperature TAM	181
1.4.1	Calculation of ambient temperature at start(ES to ERU)	181
1.4.1.1	Initialisation at reset	182
1.4.1.2	Formula section	182
1.4.2	Calculation of ambient temperature at Engine stop(ERU to ES)	182
1.4.2.1	At reset	183
1.4.2.2	Initialisations at non volatile memory system event(NVMY).	183
1.4.2.3	Formula section	184
1.5	Ambient air temperature TAM (Appl. Inc.)	185
1.5.1	Initialisation at Reset	188
1.5.1.1	Initialization of TIA_1	188
1.5.1.1.1	For loop	188
1.5.1.1.1.1	Calculation of TIA_1 at reset	189
1.5.2	Formula section	189
1.5.2.1	Calculation of T_IGK and LV_TAM_MES_VLD	189


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
			Sign
		2008-02-27	SV P GS Sys ES
	Designation		
	Engine Management System MSD87-6		
		Document Key	Pages
		E150.035.49.01 SPE 000 28.0 (Draft)	3 of 10080
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

1.5.2.2	Calculation TAM_MES and relevant variables.	189
1.5.2.3	Cold-Start Detection for AIRT functionalities	190
1.5.2.4	Calculation TIA_1, LV_ERR_TIA_1, TEMP_COLD_SRC and MAF_STK_FG_PRED	190
1.6	Intake air temperature TIA	192
1.6.1	Function description	193
1.6.1.1	Temperature determination	193
1.6.1.2	Formula section	194
1.6.1.3	Calculation at Engine stall to engine run event	197
1.7	Electrical TIA diagnosis	198
1.7.1	Function description	199
1.7.1.1	Reset	201
1.7.1.2	Formula section	201
1.7.1.3	ERRM_VIS_OUT	207
1.8	Global TIA system error (LV_ERR_TIA)	209
1.8.1	Function Description	209
1.8.1.1	Reset calculation	210
1.8.1.2	Formula Section	210
1.9	Electrical TIA_TCHA_UP diagnosis (LV_ERR_TIA_TCHA_UP)	211
1.9.1	Function Description	211
1.9.1.1	Initialisation at system event RESET and IGKON	212
1.9.1.2	At deactivation	212
1.9.1.3	Formula section	213
1.9.1.4	Visual mode output calculation	215
1.10	TIA plausibility check (LV_ERR_TIA_PLAUS)	216
1.10.1	Function Description	217
1.10.1.1	Initialisations	220
1.10.1.2	Formula section	224
1.10.1.3	SUBFUNCTION: SIG_MNG	234
1.11	Intake air temperature sensor diagnosis (Applic. Inc.)	235
1.11.1	Inhibition of TIA_PLAUS diagnosis due to present error	236
1.11.1.1	Initialisation	237
1.11.1.2	Formula Section	237
1.11.2	Interface for Rate – Based – Monitoring	238
1.11.2.1	Formula Section at reset on driving cycle on	240
1.11.2.2	Initialisation at Failure Memory Reset	242
1.11.2.3	Formula section for 1 second recurrence	243
1.12	Ambient temperature sensor diagnosis (TAM)	246
1.12.1	Global TAM system error (LV_ERR_TAM)	247
1.12.2	CAN based TAM – signal diagnosis (LV_ERR_TAM_CAN)	248
1.12.3	Ambient temperature sensor plausibility check (LV_ERR_TAM_PLAUS)	249
1.13	TAM Plausibility diagnosis	253
1.13.1	Initialization	262
1.13.1.1	Reset	263
1.13.1.2	Initialisation of all TAM sensor diagnosis related error information at reset, Key-ON and Clear-FMY	264
1.13.1.3	FOR-Loop	264
1.13.1.3.1	Initialisation Loop over all TIA sensors present in system	265



Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation		Sign
	Engine Management System MSD87-6		
	Document Key	Pages	
	E150.035.49.01 SPE 000 28.0 (Draft)	4 of 10080	
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

1.13.1.3.1.1	Initialisation of all TIA sensor diagnosis related error information at reset, Key-ON and Clear-FMY	265
1.13.2	Formula section at 100MS event	265
1.13.2.1	Chart	267
1.13.2.2	Calculation of Preliminary diagnosis conditions and relevant variables	268
1.13.2.2.1	Cold or Hot check selection	268
1.13.2.2.1.1	Calculation of Temperature variables required for a Cold-check activation and sensor diagnosis	269
1.13.2.2.1.1.1	Calculation of variables for engine-preheating detection	271
1.13.2.2.1.1.1.1	Calculation of variables used in Cold-check(sensors cross-check)	273
1.13.2.2.1.1.1.1.1	For-Loop	274
1.13.2.2.1.1.1.2	Calculation of TIA_REF_PLAUS_TAM_COLD_TMP	275
1.13.2.2.1.2	Detection of engine pre-heating	275
1.13.2.2.1.2.1	Detection of vehicle pre-heating by sun	278
1.13.2.3	Ambient-air-temperature sensor diagnosis - COLD-Check	279
1.13.2.3.1	Cross-Check	279
1.13.2.3.1.1	Cross-check algorithm	281
1.13.2.3.1.1.1	For-loop	281
1.13.2.3.1.1.1.1	Temperature Sensors Cross-check coordination	281
1.13.2.3.1.1.1.1.1	Ambient-air-temperature sensor Cross-check	283
1.13.2.3.1.1.1.1.2	Intake-air-temperature Cross-check	284
1.13.2.3.1.1.1.1.3	Engine coolant temperature Cross-check	285
1.13.2.3.2	APPL_TOOL	285
1.13.2.4	Ambient-air-temperature sensor diagnosis - HOT-Check	286
1.13.2.4.1	Stability check of ambient-air temperature for Hot-check	286
1.13.2.4.1.1	Calculation of variables required for TAM_MES_MMV stability check	287
1.13.2.4.1.2	TAM_MES_MMV stability check	288
1.13.2.4.2	Coordination of all conditions required for allowing TAM_MES hot-check	288
1.13.2.4.2.1	T_PLAUS_TAM_HOT_X	289
1.13.2.4.3	Hot-check error declaration activation	289
1.13.2.4.3.1	Calculation for ERR_SYM_PLAUS_TAM_HOT_TMP	290
1.13.2.4.3.2	Symptom filtering for HOT-check	291
1.13.2.5	Coordination of TAM plausibility diagnosis error declaration	292
1.13.2.5.1	Final diagnosis error definiton	293
1.13.2.5.2	Interface to ERRM	293
1.13.2.5.2.1	No title given	294
1.13.2.5.2.1.1	No title given	294
1.13.3	AIRT_PLADGTAM0/DISP_ERRM_DGO	294
1.13.3.1	AIRT_PLADGTAM0/DISP_ERRM_DGO/PTR	295
1.14	Ambient temperature sensor diagnosis (TAM)	296
1.14.1	Global TAM system error (LV_ERR_TAM)	297
1.14.2	CAN based TAM – signal diagnosis (LV_ERR_TAM_CAN)	298
1.14.3	Ambient temperature sensor plausibility check (LV_ERR_TAM_PLAUS)	299
1.15	Ambient temperature sensor plausibility check (Applic. Inc.)	303
1.15.1	Inhibition of diagnosis	304
1.15.1.1	Formula Section	305
1.15.1.2	Initialization	306
1.15.1.3	SUBFUNCTION: SIG_MNG	307
1.15.2	Interface for Rate – Based – Monitoring	307
1.15.2.1	Reset at FMY_CLR EVENT	308
1.15.2.2	Initialization at DCON	308
1.15.2.3	Formula Section for SYSTEM EVENT DCON	309


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
		Designation	
		Engine Management System MSD87-6	
		Document Key	
		E150.035.49.01 SPE 000 28.0 (Draft)	
		Pages	5 of 10080
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

1.15.2.4	Formula Section for SYSTEM EVENT 1S	313
1.16	Customer adaptation module: AIRT	315
2	Combustion modes	317
2.1	Lambda testing for Stratified Mode	321
2.2	Combustion State Manager (Appl. Incidences)	323
2.2.1	Variables of Non implemented Functions for combustion management	326
2.3	Customer adaptation module: AGGR CBMD	327
2.3.1	Outputs for BMW which are defined as CBMD exported data	328
2.3.2	Outputs for SV aggregates	329
3	Charger	331
3.1	Waste gate driver diagnosis (LV_ERR_WG_x_DR)	335
3.2	Recirculation flap diagnosis (LV_ERR_RFP_DR)	338
3.3	Charge Air Pressure Sensor Diagnosis (PUT)	341
3.4	PUT sensor diagnosis (Appl. Inc.)	343
3.5	Customer adaptation module: AGGR CHRГ	345
3.5.1	Outputs for SV Aggregates	345
4	Cylinder individual lambda control	347
4.1	Cylinder individual Lambda Control based on a WRAF Sensor	357
4.1.1	Initialization (at reset):	362
4.1.2	Storage of the adaptation value:	366
4.1.3	Adaptation reset by external tool intervention	369
4.1.4	Activation (exhaust bank selective):	371
4.1.5	Deactivation (exhaust bank selective):	397
4.1.6	Signal evaluation (segment synchronous)	416
4.1.6.1	Calculation of the segment period	416
4.1.6.2	Calculation of the phase displacement	416
4.1.6.3	State - Transition	420
4.1.6.4	Trigger detection	423
4.1.7	Signal conversion	424
4.1.8	Calculation of time lag of the lambda-sensor model	424



Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Sign	
		Designation	
		Engine Management System MSD87-6	
		Document Key	Pages
		E150.035.49.01 SPE 000 28.0 (Draft)	6 of 10080
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

4.1.9	Calculation of the estimation-error	424
4.1.10	Weighting the estimation-error	424
4.1.11	Signal splitting / Calculation of the cylinder selective AFR / Signal merge	425
4.1.12	Sensor model	429
4.1.12.1	Calculation of model parameters	431
4.1.12.2	Calculation of the sensor model output	431
4.1.13	Control system	432
4.1.13.1	Control deviation	432
4.1.13.2	Calculation of proportional-action controller (P-Component)	434
4.1.13.3	Calculation of integral-action controller (I-Component)	434
4.1.13.4	Mean value shift	438
4.1.13.5	Calculation of the controller output	440
4.1.13.6	Limitation of the controller output	440
4.1.13.7	Anti-Wind-Up	441
4.1.13.8	Cylinder individual lambda adaptation	443
4.1.13.9	Update of cylinder individual lambda adaptation values	463
4.1.14	Calculation of the cylinder individual injection time correction	482
4.1.15	Calculation of the characteristic value of the state variables – control action result	488
4.1.16	Detection of observer divergence	492
4.1.17	Adaptation head-condition	495
4.1.18	Calculation of cylinder individual fuel mass offset correction – weighted output	497
4.2.1	Initialization (at reset)	505
4.2.2	Reset at E ² PROM – failure	507
4.2.3	Adaptation reset by external tool intervention	507
4.2.4	Activation	509
4.2.5	Deactivation	510
4.2.6	Monitoring the engine roughness	510
4.2.7	Detection of the cylinder individual lambda controller output oscillation:	512
4.2.8	Detection of Cylinder Individual lambda Control Instability – based on CILC- controller output:	515
4.2.9	Detection of Cylinder Individual lambda Control Instability – based on CILC - Characteristic Quantity:	515
4.2.10	Detection of Cylinder Individual lambda Control Instability – based on engine roughness:	517
4.2.11	Adaptation start	517
4.2.12	Evaluation of adaptation result	519
4.2.13	Control action	527
4.2.13.1	Initial-action	527
4.2.13.2	Recursive decrement-action	527
4.2.13.3	Recursive increment-action	528
4.2.13.4	Hold-action	528
4.2.13.5	Calculation of the adaptation value	529
4.2.14	Error detection	532
4.2.15	Storing the adaptation value after power latch	532
4.2.16	Counter update in case of CILC stable	532
4.3	Application Incidences for the Cylinder Individual Lambda Control	536
4.4	Detection of Limited Dynamics for Cylinder Individual Lambda Control	547
4.4.1	Evaluation of the dynamic window for the engine speed	548
4.4.2	Evaluation of the dynamic window for the air mass flow	550
4.4.3	Evaluation of the dynamic window for the lambda controller output mean value	550
4.4.4	Calculation of the air mass flow integral – detection of limited dynamics	550

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
		Designation	
		Engine Management System MSD87-6	
		Document Key	
		E150.035.49.01 SPE 000 28.0 (Draft)	
		Pages	7 of 10080
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

4.5	Cylinder Individual Lambda Control Monitoring	552
4.6	Cylinder balancing diagnosis	554
4.6.1	Reset action using reset switch or service tool intervention	569
4.6.2	Decrement action in case of no failure detected	570
4.6.3	Inhibition due to balancing error detected	570
4.6.3.1	Inhibition of cylinder individual lambda control	570
4.6.3.2	Inhibition of CYBL_ER	570
4.6.4	Diagnosis condition	571
4.6.4.1	Diagnosis condition - output of cylinder individual lambda control concerned	571
4.6.4.2	Diagnosis condition - output of CYBL_ER concerned	571
4.6.5	Diagnosis self-shutoff	571
4.6.6	Error detection	572
4.6.6.1	Error detection in the area where the cylinder individual lambda adaptation is concerned	572
4.6.6.2	Error detection in the area where output of CYBL_ER is concerned	576
4.6.7	Update of diagnosis window	579
4.6.7.1	Update of diagnosis window - output of cylinder individual lambda control concerned	579
4.6.7.1.1	Diagnosis- interrupt in case of intervention of phase shift adaptation	581
4.6.7.2	Update of diagnosis window - output of CYBL_ER concerned	582


5 Car body 585

5.1	CRBY - Requirements to Infrastructure interface	588
5.2	E-box cooling fan	593

6 Cylinder balancing 597

6.1	AGGR CYBL adaptation	607
6.2	Engine roughness signal preparation for cylinder balancing	608
6.2.1	General information:	609
6.2.1.1	SUBFUNCTION: INI	612
6.2.1.2	Calculation of OPR_ER_STND and OPR_DRV1 tasks	616
6.2.1.3	SUBFUNCTION: SIG_MNG	622
6.3	Coordination of the Injection Time Correction Factors for CYBL	623
6.3.1	General information	624
6.3.1.1	Calculation of variables at reset	628
6.3.1.2	Calculation of 100ms, 10ms and segment synchronous tasks	629
6.3.1.3	SUBFUNCTION: SIG_MNG	667
6.4	Cylinder balancing via ER (Appl. Inc.)	668
6.4.1	General information	668
6.4.1.1	Calculation of variables at reset	671
6.4.1.2	Calculation of 100ms and 10ms tasks	673


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Sign	
		Designation	
		Engine Management System MSD87-6	
Document Key		Pages	
E150.035.49.01 SPE 000 28.0 (Draft)		8 of 10080	
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

6.4.1.3	SUBFUNCTION: SIG_MNG	675
6.5	Cylinder balancing via additive MFF intervention	676
6.5.1	General information	677
6.5.1.1	Calculation of non volatile memory tasks	681
6.5.1.2	Calculation of 100ms and segment synchronous tasks	683
6.5.1.3	SUBFUNCTION: SIG_MNG	704
6.6	Cylinder balancing via multiple TI intervention	705
6.6.1	General information:	706
6.6.1.1	Calculation of non volatile memory tasks	710
6.6.1.2	Calculation of 100ms and segment synchronous tasks	712
6.6.1.3	SUBFUNCTION: SIG_MNG	734
6.7	Cylinder Balancing Manager	735
6.7.1	General information:	736
6.7.1.1	Initialization of variables	740
6.7.1.2	Calculation of segment task	741
6.7.1.3	SUBFUNCTION: SIG_MNG	749
6.8	Cylinder balancing manager (Appl Inc.)	750
6.8.1	General information	751
6.8.1.1	Calculation of all variables at reset task or LC_TI_ER_BAL_STOP_MAN = 1	753
6.8.1.2	Calculation of segment task	754
6.8.1.3	SUBFUNCTION: SIG_MNG	762
6.9	CYBL scheduler	763
6.9.1	Non volatile memory tasks (CYBL_ER):	764
6.9.2	Initialization tasks (CYBL_ER):	765
6.9.3	Recurring tasks(CYBL_ER):	767
6.9.4	Main interfering AGGR tasks for CYBL_ER:	767
6.10	Cylinder balancing coordination at EOL	768
6.10.1	External adjustment of cylinder balancing readiness at end of line (EOL):	772
6.10.2	Manual reset of cylinder balancing readiness at end of line (EOL):	773
6.10.3	Automatic reset of cylinder balancing end of line (EOL) readiness:	775
6.10.4	Calculation of cylinder balancing engine roughness adaptation readiness (EOL):	777
6.10.5	Calculation of cylinder balancing selective lambda adaptation readiness (EOL):	780
6.10.6	Calculation of cylinder balancing lambda adaptation readiness (EOL):	787
6.11	Cylinder balancing coordination at DC	793
6.11.1	Manual reset of cylinder balancing readiness at active driving cycle (DC):	797
6.11.2	Waste gate open request for cylinder balancing adaptation:	798
6.11.3	Homogenous combustion mode request for cylinder balancing adaptation:	799
6.11.4	Determination of lambda adaptation cycle for cylinder balancing at DC	800
6.11.5	Calculation of cylinder balancing selective lambda adaptation readiness (DC):	801
6.11.6	Calculation of cylinder balancing lambda adaptation readiness (DC):	811
6.12	Customer adaptation module: AGGR CYBL	820
6.12.1	Outputs for BMW which are not defined as CYBL exported data	820
6.12.2	Outputs for SV aggregates	822


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
			Sign
		2008-02-27	SV P GS Sys ES
	Designation Engine Management System MSD87-6		
	Document Key E150.035.49.01 SPE 000 28.0 (Draft)	Pages 9 of 10080	
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

7	Diagnostic communication	823
7.1	DGNC – Introduction	855
7.2	Coding diagnosis	859
7.2.1	Wrong / not coded vehicle	859
7.2.2	Errors during coding process	860
7.3	Message structure (UDS)	862
7.3.1	ECU ID's on FlexRay	862
7.3.2	Message structure on CAN	862
7.4	Initialisation and Timing	865
7.4.1	Protocol Switching	865
7.4.2	Initialisation of different protocols	866
7.4.3	KWP* Detection	867
7.4.4	WUP Detection for KWP	868
7.4.5	Timing	869
7.5	Error handling	870
7.5.1	Error handling during physical/functional Fast Initialization	870
7.5.1.1	Client(tester) Error handling during physical/functional Fast Initialization	870
7.5.1.2	Server(ECU) Error Handling during physical/functional Fast Initialization (normal timing only)	870
7.5.2	Error handling after physical/functional Initialization	871
7.5.2.1	Client(tester) Error handling after physical/functional Initialization	871
7.5.2.2	Server(ECU) Error Handling after physical/functional Initialization	871
7.6	Error-Codes	872
7.6.1	General negative Responses	872
7.7	UDS – SID 10h: DiagnosticSessionControl service	873
7.7.1	DiagnosticSessionControl Request	873
7.7.2	DiagnosticSessionControl positive response	874
7.7.3	DiagnosticSessionControl negative Response	874
7.7.3.1	Supported Negative Response Codes	874
7.8	UDS – SID 10h: DiagnosticSessionControl service (Appl.Inc.)	876
7.8.1	Part valid for Cboot SW	877
7.8.1.1	Supported diagnosticSessionTypes	877
7.8.1.2	Diagnostic Session transition	878
7.8.2	Part valid for Application SW	878
7.8.2.1	Supported diagnosticSessionTypes	878
7.8.2.2	Diagnostic Session transition	879
7.8.3	Supported Negative Response Codes	879
7.9	UDS - SID 28h: communicationControl	880
7.9.1	CommunicationControl request	880
7.9.1.1	CommunicationControl positive response	880
7.9.1.2	CommunicationControl negative response	880
7.9.1.3	Supported Negative Response Codes	881
7.10	UDS – SID 28h: CommunicationControl service (Appl. Inc.)	882
7.10.1	Overview of implemented CommunicationControl Services	882
7.10.2	Part valid for Cboot SW	882


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation Engine Management System MSD87-6		
	Document Key E150.035.49.01 SPE 000 28.0 (Draft)		Pages 10 of 10080
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

7.10.2.1	Possible different sub-functions (control types)	882
7.10.2.2	Possible different communication types (communicationType)	883
7.10.3	Part valid for Application SW Supported controlTypes and communication Type are same as in Cboot SW above but the handling different as mentioned in the below section	884
7.11	UDS – SID 85h: ControlDTCSetting service	886
7.11.1	ControlDTCSetting request	886
7.11.1.1	ControlDTCSetting positive response	886
7.11.1.2	ControlDTCSetting negative response	887
7.11.1.3	Supported Negative Response Codes	887
7.12	ControlDTCSetting Service (Appl. Inc.) (85 hex) service (UDS)	888
7.12.1	Overview of implemented Control DTC Setting Service	888
7.12.1.1	ControlDTCSetting request	889
7.12.1.2	ControlDTCSetting positive response	889
7.13	Response OnEvent (86 hex) service (UDS)	890
7.13.1	Overview of implemented subservices:	890
7.13.2	ResponseOnEvent - Start	891
7.13.2.1	ResponseOnEvent request (Start)	892
7.13.2.2	ResponseOnEvent positive Response (Start)	892
7.13.3	ResponseOnEvent - Stop	893
7.13.3.1	ResponseOnEvent request (Stop)	893
7.13.3.2	ResponseOnEvent positive Response (stop)	894
7.13.4	ResponseOnEvent - Setup	894
7.13.4.1	ResponseOnEvent request (Setup)	894
7.13.4.2	ResponseOnEvent positive Response (Setup)	894
7.13.5	ResponseOnEvent – Report activated events	895
7.13.5.1	ResponseOnEvent request	895
7.13.5.2	ResponseOnEvent positive Response	895
7.13.6	ResponseOnEvent negative Response	895
7.13.7	Supported Negative Response Codes	896
7.14	SID 11h: ecuReset Service	897
7.14.1	11,01 ECU Reset	897
7.14.2	11,04 Request ECU-PowerDownMode	898
7.14.3	11,41 Set ECU-PowerDownMode	899
7.15	SID 14h: clearDiagnosticInformation Service	900
7.15.1	14h - ClearDiagnosticInformation service	900
7.15.2	ClearDiagnosticInformation (14 hex) Service (UDS)	902
7.15.2.1	ClearDiagnosticInformation request	902
7.15.2.2	ClearDiagnosticInformation positive response	902
7.15.2.3	ClearDiagnosticInformation negative response	902
7.15.2.4	Supported Negative Response Codes	902
7.15.3	ClearDiagnosticInformation (14hex) service (UDS – Application Incident)	903
7.16	ReadDTCInformation (19hex) service (UDS)	905
7.16.1	Overview of implemented ReadDTCInformation services:	905
7.16.2	Service 19,02 - reportDTCByStatusMask	906
7.16.2.1	reportDTCByStatusMask - request	907
7.16.2.2	reportDTCByStatusMask - positive response	907
7.16.2.3	reportDTCByStatusMask - negative response	908
7.16.2.4	Supported Negative Response Codes	908



Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation Engine Management System MSD87-6		
	Document Key	Pages	
E150.035.49.01 SPE 000 28.0 (Draft)	11 of 10080		
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

7.16.3	Service 19,04 - reportDTCSnapshotRecordByDTCNumber	908
7.16.3.1	reportDTCSnapshotRecordByDTCNumber - request	909
7.16.3.2	reportDTCSnapshotRecordByDTCNumber – positive response	909
7.16.3.3	reportDTCSnapshotRecordByDTCNumber – negative response	912
7.16.3.4	Supported Negative Response Codes	912
7.16.4	Service 19,06 - reportDTCExtendedDataRecordByDTCNumber	912
7.16.4.1	reportDTCExtendedDataRecordByDTCNumber - request	913
7.16.4.2	reportDTCExtendedDataRecordByDTCNumber - positive response	913
7.16.4.3	reportDTCSnapshotRecordByDTCNumber – negative response	914
7.16.4.4	Supported Negative Response Codes	914
7.16.5	Service 19,0A - ReportSupportedDTCs	914
7.16.5.1	ReportSupported DTCs - request	915
7.16.5.2	ReportSupported DTCs - positive response	915
7.17	UDS – SID 22h: ReadDataByIdentifier service	916
7.17.1	ReadDataByIdentifier request	916
7.17.2	ReadDataByIdentifier positive response	917
7.17.3	ReadDataByIdentifier negative response	917
7.17.3.1	Supported Negative Response Codes	917
7.18	ReadDataByIdentifier (22 hex) service (UDS)	919
7.18.1	Overview of implemented ReadDataByIdentifier services	921
7.18.2	22,10,00 Read CHK_STAMP	923
7.18.3	22,10,01 Read CBS/BOS	924
7.18.4	22,10,0A Read EGY (energy saving status)	925
7.18.5	22,10,0E Read ExtendedMode	926
7.18.6	22,16,00 Read number of intelligent subbus members	926
7.18.7	22,16,01-FF Read detailed informations of intelligent subbus member	927
7.18.8	22,17,01 Debug service - Read systemtime	929
7.18.9	22,17,04 DTC sending with timestamp for active DTC reporting	930
7.18.10	22,17,23 Debug service - Read DTC's with active error response	931
7.18.11	22,17,24 Debug service - Read lockable DTC	932
7.18.12	22,20,00 Read list of DTC's from Secondary error memory	934
7.18.13	22,20,01-0F Read detailed information of DTC in secondary error memory	936
7.18.14	22,25,01 Memory-Segmentation-Table	940
7.18.15	22,25,02 Programming-Counter	941
7.18.16	22,25,03 Programming-Counter-Max-Value	942
7.18.17	22,25,04 Flash-Timing-Parameter	942
7.18.18	22,25,08 Read GatewayStatus	943
7.18.19	22,33,00 Read BSR-Config	943
7.18.20	22,33,20 Read BSU-Config	944
7.18.21	22,33,50 Read CAF_ID	945
7.18.22	22,33,51 Read Coding_signatur	946
7.18.23	22,37,FE Read CPS (Codierungprüfstempel)	947
7.18.24	22,40,00 Read MW	947
7.18.25	22,40,01 Read BLZ	949
7.18.26	22,40,02 Read SSZ1	950
7.18.27	22,40,03 Read MRL	950
7.18.28	22,40,06 Read NWA	951
7.18.29	22,40,07 Read SSZ0	954
7.18.30	22,40,08 Read DK	955
7.18.31	22,40,0A Read GAW	955
7.18.32	22,40,15 Read FASTA10	956
7.18.33	22,40,16 Read IGRINFO	957


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
		Designation	
		Engine Management System MSD87-6	
		Document Key	
		E150.035.49.01 SPE 000 28.0 (Draft)	
		Pages	12 of 10080
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

7.18.34	22,40,17	Read LEMINFO	958
7.18.35	22,40,18	Read MSAINFO	959
7.18.36	22,40,1A	Read BZEINFO	959
7.18.37	22,40,1B	Read GENINFO	960
7.18.38	22,40,1D	Read VERBREDINFO	962
7.18.39	22,40,21	Read IBS	963
7.18.40	22,40,22	Read PM1	964
7.18.41	22,40,23	Read PM2	966
7.18.42	22,40,26	Read RBMMODE9	967
7.18.43	22,40,27	Read RBMMS1	971
7.18.44	22,40,28	Read RBMMS2	976
7.18.45	22,40,2B	Read IBS	982
7.18.46	22,40,2D	Read RWLRP	983
7.18.47	22,40,30	Read FASTA-LVS	985
7.18.48	22,41,05	Read REA	986
7.18.49	22,4A,B4	Read TRT	987
7.18.50	22,5F,86	Abgleichwert Momentenreserve im Leerlauf lesen	988
7.18.51	22,5F,8B	Read PMB	988
7.18.52	22,5F,90	Read IMAALLE	989
7.18.53	22,5F,F0	Read LL-Abgleich	990
7.18.54	22,5F,F2	Read VAR	990
7.18.55	22,5F,F3	Read UET	991
7.18.56	22,5F,F6	Read UEN	992
7.18.57	22,C0,00	Read imob status (STATUS_EWS)	993
7.18.57.1		Not for MSD87- 12cyl	993
7.18.57.2		Only for MSD87 12 cyl	994
7.18.58	22,C0,02	Read imob k_ews(tmp) (STATUS_EWS_SK)	995
7.18.58.1		Not for MSD87 12 cyl	995
7.18.58.2		Only for MSD87 12 cyl	997
7.18.59	22,F1,01	Read SVK-Aktuell	1000
7.18.60	22,F1,02	Read SVK-SystemSupplier	1002
7.18.61	22,F1,03	Read SVK-Werk	1003
7.18.62	22,F1,04..0B	Read SVK-Backup_01..08	1005
7.18.63	22,F1,0C..40	Read SVK-Backup_09..61	1007
7.18.64	22,F1,41	Read DynamicallyDefinedDataIdentifier	1007
7.18.65	22,F1,50	SGBD-Index	1008
7.18.66	22,F1,86	Active Diagnostic Session	1009
7.18.67	22,F1,8A	System-Supplier-Identification	1010
7.18.68	22,F1,8B	ECU-Manufacturing-Data	1011
7.18.69	22,F1,8C	ECU-Serial-Number	1012
7.18.70	22,F1,90	VIN	1012
7.18.71	22,FD,01	Read ActiveSubsystem	1013
7.18.72	22,FD,02	Read supported DSTs	1014
7.18.73	22,FD,03	Read supported services	1014
7.19		UDS - SID 2Fh: inputOutputControlByIdentifier Service	1017
7.19.1		Overview of implemented subservices	1024
7.19.2		Stop actuator diagnosis with UDS 2F,60,xx,00	1025
7.19.3		Actuator diagnosis read values with UDS 2F,60,xx,01	1028
7.19.4		Start actuator diagnosis with UDS 2F,60,xx,03	1030
7.19.4.1		Flag for disable adaptations while external adjust with UDS 2F,60,xx,03 services	1031
7.19.4.2		Activation conditions for UDS 2F,60,xx,03	1031
7.19.4.3		2F,60,1C,03 Kl.87 Spannung / Versorgung DME (Digitale Motor Elektronik) ansteuern	1032
7.19.4.4		2F,60,20,03 Versorgung HPDI-Ventil steuern	1033

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation		Sign
	Engine Management System MSD87-6		
	Document Key	Pages	
	E150.035.49.01 SPE 000 28.0 (Draft)	13 of 10080	
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification


7.19.4.5	2F,60,2A,03 Drosselklappe ansteuern	1033
7.19.4.6	2F,60,32,03 Generator Sollspannung BSD (Bit Serielle Datenschnittstelle) ansteuern	1034
7.19.4.7	2F,60,81,03 ECF-Relais steuern	1034
7.19.4.8	2F,60,82,03 HPD-Relais steuern	1035
7.19.4.9	2F,60,83,03 Wasserpumpe Lagerstuhl Turbolader steuern	1035
7.19.4.10	2F,60,84,03 Drosselklappenstellergehaeuseheizung 2 ansteuern	1036
7.19.4.11	2F,60,85,03 Drosselklappe 2 steuern	1036
7.19.4.12	2F,60,86,03 second HPD5-Mengensteuerventil steuern	1037
7.19.4.13	2F,60,87,03 Abgasklappe 2 steuern	1038
7.19.4.14	2F,60,88,03 Vanos Einlass Ventil Bank2 steuern	1038
7.19.4.15	2F,60,89,03 Vanos Auslass Ventil Bank 2 steuern	1039
7.19.4.16	2F,60,8A,03 Umluftventil Bank 2 steuern	1039
7.19.4.17	2F,60,8B,03 Sekundearluftventil 2 ansteuern	1040
7.19.4.18	2F,60,9E,03 Drosselklappenstellergehaeuseheizung ansteuern	1041
7.19.4.19	2F,60,A4,03 Gesteuerte Luftfuehrung ansteuern (untere Klappe - PKKS)	1041
7.19.4.20	2F,60,AD,03 Kurbelgehaeuseentlueftungsheizung ansteuern	1042
7.19.4.21	2F,60,B5,03 Umluftventil Bank 1 steuern	1042
7.19.4.22	2F,60,B6,03 Ladedrucksteller 1 ansteuern	1043
7.19.4.23	2F,60,B7,03 Ladedrucksteller 2 ansteuern	1043
7.19.4.24	2F,60,BD,03 Mengensteuerventil ansteuern	1044
7.19.4.25	2F,60,BF,03 Zusatzwasserpumpe über LIN steuern	1044
7.19.4.26	2F,60,C1,03 Abgasklappe ansteuern	1045
7.19.4.27	2F,60,C2,03 Soundklappe ansteuern	1045
7.19.4.28	2F,60,C3,03 Gesteuerte Luftfuehrung ansteuern (obere Klappe – AKKS-LIN)	1046
7.19.4.29	2F,60,C4,03 Startrelais ansteuern	1047
7.19.4.30	2F,60,C8,03 E-Box-Luefter ansteuern	1047
7.19.4.31	2F,60,C9,03 Kennfeldthermostat ansteuern	1048
7.19.4.32	2F,60,CA,03 Sekundearluftventil ansteuern	1048
7.19.4.33	2F,60,CB,03 Sekundearluftpumpe ansteuern	1049
7.19.4.34	2F,60,CC,03 Diagnosemodul-Tank Leakage Pumpe ansteuern	1050
7.19.4.35	2F,60,CD,03 Diagnosemodul-Tank Leakage Ventil ansteuern	1050
7.19.4.36	2F,60,CE,03 Diagnosemodul-Tank Leakage Heizung ansteuern	1051
7.19.4.37	2F,60,CF,03 Tankentlueftungsventil ansteuern	1051
7.19.4.38	2F,60,D0,03 Lambdasondenheizung vor Kat Bank1 ansteuern	1052
7.19.4.39	2F,60,D1,03 Lambdasondenheizung hinter Kat Bank1 ansteuern	1052
7.19.4.40	2F,60,D2,03 Lambdasondenheizung vor Kat Bank2 ansteuern	1053
7.19.4.41	2F,60,D3,03 Lambdasondenheizung hinter Kat Bank2 ansteuern	1054
7.19.4.42	2F,60,D4,03 MIL (Malfunction Indicator Lamp) ansteuern	1054
7.19.4.43	2F,60,D6,03 EML (Engine Malfunction Lamp) ansteuern	1055
7.19.4.44	2F,60,D8,03 Elektrische Kraftstoffpumpe ansteuern	1055
7.19.4.45	2F,60,DA,03 E-Luefter ansteuern	1056
7.19.4.46	2F,60,ED,03 Vanos Einlass Ventil ansteuern	1056
7.19.4.47	2F,60,EE,03 Vanos Auslass Ventil ansteuern	1057
7.19.4.48	2F,60,EF,03 HPD5 Mengensteuerventil 1 ansteuern	1057

7.20 UDS – SID 31h: RoutineControl service 1059

7.20.1	RoutineControl request	1059
7.20.1.1	Supported routineControlTypes	1059
7.20.2	RoutineControl positive response	1060
7.20.3	RoutineControl negative response	1060
7.20.3.1	Supported Negative Response Codes	1060

7.21 UDS - SID 31h: routineControl Service (Appl. Inc.) 1062


7.21.1	Overview of implemented Routine Controls	1067
--------	--	------

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation		Pages
	Engine Management System MSD87-6		
	Document Key	14 of 10080	
	E150.035.49.01 SPE 000 28.0 (Draft)		

general specification

7.21.2	General information	1069
7.21.3	31,01,02,02 Check Memory – IndicatedCheckValue	1070
7.21.4	31,01,02,03 Check Programming Pre Condition	1071
7.21.5	31,01,02,04 Read SWE Programming Status	1072
7.21.6	31,01,02,05 Read SWE Development Information	1073
7.21.7	31,01,02,06 Check Programming Power	1074
7.21.8	31,01,03,03 Loopback-Testfunktion	1076
7.21.9	31,01,03,04 Debug service: Entry into Failure Memory	1076
7.21.10	31,01,0F,01 CheckCodingSignatur	1078
7.21.11	31,01,0F,0C Set energy spare mode	1079
7.21.12	31,01,10,03 Set erweiterter Betriebsmode	1081
7.21.13	31,01,40,01 Set Gateway-Status	1083
7.21.14	31,01,F0,05 Set PowerDownMode of ECU	1084
7.21.15	31,01,F0,06 ClearInfoSpeicherDiagnosticInformation	1085
7.21.16	31,0x,F0,20 Services for EOL-test Secondary Air System	1087
7.21.16.1	On EOL-test Secondary Air System	1087
7.21.16.2	Off EOL-test Secondary Air System	1089
7.21.16.3	Report results of EOL-test Secondary Air System	1089
7.21.17	31,0x,F0,22 Services for EOL-test Canister purge solenoid	1090
7.21.17.1	On EOL-test Canister purge solenoid	1091
7.21.17.2	Off EOL-test Canister purge solenoid	1091
7.21.17.3	Report results of EOL-test Canister purge solenoid	1092
7.21.18	31,0x,F0,25 Services for test of injection valves	1093
7.21.18.1	Switch off Injection valves	1093
7.21.18.2	Report result of injection valves switch off	1094
7.21.19	31,0x,F0,26 Services for EOL-test N_SP_IS displace	1095
7.21.19.1	On EOL-test N_SP_IS displace	1095
7.21.19.2	Off EOL-test N_SP_IS displace	1096
7.21.19.3	Report results of EOL-test N_SP_IS displace	1096
7.21.20	31,0x,F0,2A Services for EOL-test Generator	1097
7.21.20.1	On EOL-test Generator	1097
7.21.20.2	Off EOL-test Generator	1098
7.21.20.3	Report results of EOL-test Generator	1099
7.21.21	31,0x,F0,2B Services for Ruhestromtest mit IBS	1099
7.21.21.1	On Ruhestromtest with IBS	1099
7.21.21.2	Report result of Ruhestromtest with IBS	1100
7.21.22	31,0x,F0,2C Services for ODR (Oil Pressure Regulation Diagnosis)	1101
7.21.22.1	On EOL-test ODR (Oil Pressure Regulation Diagnosis)	1101
7.21.22.2	Off EOL-test ODR (Oil Pressure Regulation Diagnosis)	1102
7.21.23	31,01,F0,30 Delete selective adaptation values	1103
7.21.24	31,01,F0,31 Delete selective adaptation 2 values	1107
7.21.25	31,0x,F0,34 Ansteuern Zylinder Gleichstellung Homogen	1109
7.21.25.1	On Ansteuern Zylinder Gleichstellung Homogen	1109
7.21.25.2	Off Ansteuern Zylinder Gleichstellung Homogen	1110
7.21.25.3	Report result of Zylinder Gleichstellung Homogen	1110
7.21.26	31,0x,F0,CF Services for Sperre Tankentlueftung	1111
7.21.27	31,0x,F0,D0 Services for EOL-test AbgasTurboLader	1113
7.21.27.1	On EOL-test AbgasTurboLader	1113
7.21.27.2	Off EOL-test AbgasTurboLader	1114
7.21.27.3	Report results of EOL-test AbgasTurboLader	1114
7.21.28	31,0x,F0,D5 Services for EOL- ECRAS system test	1116
7.21.28.1	On EOL Test - ECRAS system test	1116
7.21.28.2	Off EOL Test - ECRAS system test	1116


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation		Pages
	Engine Management System MSD87-6		
	Document Key		15 of 10080
	E150.035.49.01 SPE 000 28.0 (Draft)		
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

7.21.28.3	Report result of ECRAS system test	1117
7.21.29	31,0x,F0,D9 Services for switch off/on Lambda controller	1119
7.21.29.1	On Switch off Lambda controller	1119
7.21.29.2	Off switch off Lambda controller	1120
7.21.29.3	Read status switch off lambda controller	1120
7.21.30	31,0x,F0,DA Services for EOL-test DMTL	1121
7.21.30.1	On EOL-test DMTL	1121
7.21.30.2	Off EOL-test DMTL	1122
7.21.30.3	Report results of EOL-test DMTL	1123
7.21.31	31,0x,F0,DF Services for EOL-test Lambda sensors confused / wrong wired - linear sensors	1124
7.21.31.1	On EOL-test Lambda sensors confused / wrong wired	1124
7.21.31.2	Off EOL-test Lambda sensors confused / wrong wired	1126
7.21.31.3	Report Results of EOL-test Lambda sensors confused / wrong wired	1126
7.21.32	31,0x,F0,E1 Services for Eisy- Adaptation(gedrosselt)	1127
7.21.32.1	Start Read Eisy- Adaptionvalues (gedrosselt)	1128
7.21.32.2	Read Eisy- Adaptionvalues(gedrosselt)	1128
7.21.33	31,0x,F0,E2 Services for Eisy- Adaptation with pressure regulation	1129
7.21.33.1	Start Read Eisy- Adaptionvalues with pressure regulation	1129
7.21.33.2	Read Eisy- Adaptionvalues	1130
7.21.34	31,0x,F0,E4 Services for Krann- Adaptation	1131
7.21.34.1	Start Read Krann- Adaptationvalues	1131
7.21.34.2	Read Krann- Adaptationvalues	1131
7.21.35	31,0x,F0,E4 Services for Klann- Adaptation	1132
7.21.35.1	Start Read Klann-Adaptation values	1132
7.21.35.2	Read Klann - Adaptionvalues	1133
7.21.36	31,01,F0,FC Arm customer security access	1134
7.21.37	31,0x,F0,F6 Services for PowerManagement Messemode	1134
7.21.37.1	On PowerManagement Messemode	1134
7.21.37.2	Off PowerManagement MesseMode	1134
7.21.37.3	Report status of PowerManagement Messemode	1135
7.21.38	31,0x,F0,F7 Services for intelligent alternator control	1136
7.21.38.1	On intelligent alternator control	1136
7.21.38.2	Off intelligent alternator control	1136
7.21.38.3	Report status of intelligent alternator control	1137
7.21.39	31,01,F1,00,07 Store FSC / 31,01,F1,00,09 Check FSC	1138
7.21.40	31,01,FF,00 Erase Memory	1142
7.21.41	31,01,FF,01 Check Programming Dependencies	1143
7.22	DUDS - SID 2Ah: ReadDataByPeriodicIdentifier service	1145
7.22.1	ReadDataByPeriodicIdentifier request	1146
7.22.2	ReadDataByPeriodicIdentifier positive response	1147
7.22.3	Periodic message data definition	1147
7.22.4	ReadDataByPeriodicIdentifier negative response	1147
7.22.4.1	Supported Negative Response Codes	1148
7.23	UDS – SID 2Ah: ReadDataByPeriodicIdentifier service (Appl. Inc.)	1152
7.23.1	Rate for supported transmissionMode (TM).	1152
7.23.2	Configuration data	1152
7.23.3	PeriodicDataIdentifiers(PDID)	1152
7.24	UDS – SID 2Ch : DynamicallyDefineDataIdentifier service	1153
7.24.1	DDDI Request message definition sub-function = defineByIdentifier	1154
7.24.2	DDDI Request message definition sub-function = defineByAddress	1154


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation Engine Management System MSD87-6		
	Document Key	Pages	
E150.035.49.01 SPE 000 28.0 (Draft)	16 of 10080		
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

7.24.3	DDDI Request message definition sub-function = clearDynamicallyDefinedDataIdentifier	1155
7.24.4	DynamicallyDefinedDataIdentifier positive response	1156
7.24.5	DynamicallyDefinedDataIdentifier negative response	1156
7.24.5.1	Supported Negative Response Codes	1156
7.24.6	Request response message flow example	1157
7.25	UDS - SID 2Ch: dynamicallyDefineDataIdentifier Service (Appl. Inc.)	1163
7.25.1	Purpose	1170
7.25.2	AddressAndLengthFormatIdentifier	1170
7.25.3	Configuration data	1170
7.25.4	DynamicallyDefinedDataIdentifier supported list for Identifier parameters	1171
7.25.5	DynamicallyDefinedDataIdentifier supported list for Memory Address/Length	1202
7.26	UDS – SID 2Eh : WriteDataByIdentifier service	1203
7.26.1	WriteDataByIdentifier request	1203
7.26.2	WriteDataByIdentifier positive response	1204
7.26.3	WriteDataByIdentifier negative response	1204
7.26.3.1	Supported Negative Response Codes	1204
7.27	UDS - SID 2Eh: writeDataByIdentifier Service (Appl. Inc.)	1207
7.27.1	Overview of implemented subservices:	1210
7.27.2	2E,10,00 Write check stamp	1210
7.27.3	2E,10,01 Write CBS/BOS	1211
7.27.4	2E,33,00 Write BSR-Config	1212
7.27.5	2E,33,20 Write BSU-Config	1214
7.27.6	2E,33,50 Write CAF_ID	1216
7.27.7	2E,33,51 Write Codiersignatur	1217
7.27.8	2E,37,FE Write CPS	1218
7.27.9	2E,5F,86 Write Abgleichwert Momentenreserve im Leerlauf	1219
7.27.10	2E,5F,8B Write PMB	1220
7.27.11	2E,5F,90 IMAALLE programmieren	1221
7.27.12	2E,5F,9x IMA0x programmieren	1225
7.27.13	2E,5F,C1 Write KVA	1227
7.27.14	2E,5F,F0,07 Abgleichwert LL ansteuern	1227
7.27.15	2E,5F,F0,08 Abgleichwert LL programmieren	1231
7.27.16	2E,5F,F2,04 Clear VAR	1232
7.27.17	2E,5F,F3,04 Clear UET (Uebertemperatursicherung)	1234
7.27.18	2E,5F,F5,04 Clear PMHistory (Powermanagement Histogramm)	1235
7.27.19	2E,5F,F6,04 Clear UEN (Ueberdrehzahlsicherung)	1236
7.27.20	2E,C0,01 Write k_ews4 (STEUERN_EWS)	1238
7.27.20.1	Not for MSD87 12 cyl	1238
7.27.20.2	Only for MSD87 12cyl	1240
7.27.21	2E,F1,5A Write Fingerprint	1245
7.27.22	2E,F1,90 Write VIN (Vehicle Identification Number)	1247
7.27.23	2E,F1,98 Write RepairShopCodeTesterSerialNumber	1248
7.28	UDS – SID 3Eh: TesterPresent service	1251
7.28.1	TesterPresent request	1251
7.28.2	TesterPresent positive response	1251
7.28.3	TesterPresent negative response	1252
7.28.3.1	Supported Negative Response Codes	1252
7.28.4	HeartBeat TesterPresent	1252


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
			Sign
		2008-02-27	SV P GS Sys ES
	Designation Engine Management System MSD87-6		
	Document Key	Pages	
E150.035.49.01 SPE 000 28.0 (Draft)	17 of 10080		
Regensburg(RBG)	Copyright (C) Continental AG 2008		A4 : 2004-06

general specification

7.29	UDS – SID 27h: SecurityAccess service	1253
7.29.1	SecurityAccess service	1254
7.29.1.1	SecurityAccess sub-function = requestSeed	1254
7.29.1.1.1	SecurityAccess sub-function = requestSeed positive response	1254
7.29.1.1.2	SecurityAccess sub-function = requestSeed negative response	1254
7.29.1.1.3	Supported Negative Response Codes	1254
7.29.1.2	SecurityAccess sub-function = sendKey	1255
7.29.1.2.1	SecurityAccess sub-function = sendKey positive response	1255
7.29.1.2.2	SecurityAccess sub-function = sendKey negative response	1255
7.29.1.2.3	Supported Negative Response Codes	1255
7.30	UDS – SID 27h: SecurityAccess service (Appl.Inc.)	1259
7.30.1	Supported SecurityAccess levels	1259
7.30.2	SecurityAccess service	1260
7.30.2.1	SecurityAccess sub-function = requestSeed	1260
7.30.2.1.1	SecurityAccess sub-function = requestSeed positive response	1260
7.30.2.2	SecurityAccess sub-function = sendKey	1261
7.30.2.2.1	SecurityAccess sub-function = sendKey positive response	1261
7.30.2.3	SecurityAccess negative response	1262
7.30.2.3.1	Supported Negative Response Codes	1262
7.31	UDS – SID 11h: EcuReset service	1263
7.31.1	EcuReset request (C-BOOT)	1263
7.31.2	EcuReset positive response	1263
7.31.3	EcuReset negative response	1264
7.31.3.1	Supported Negative Response Codes	1264
7.31.4	EcuReset request (ECU-BOOT)	1264
7.31.5	EcuReset positive response	1265
7.31.6	EcuReset negative response	1265
7.31.6.1	Supported Negative Response Codes	1265
7.32	UDS – SID 14h: ClearDiagnosticInformation service	1267
7.32.1	ClearDiagnosticInformation request	1267
7.32.2	ClearDiagnosticInformation positive response	1267
7.32.3	ClearDiagnosticInformation negative response	1268
7.32.3.1	Supported Negative Response Codes	1268
7.33	UDS – SID 23h: ReadMemoryByAddress service	1269
7.33.1	ReadMemoryByAddress request	1269
7.33.2	ReadMemoryByAddress positive response	1270
7.33.3	ReadMemoryByAddress negative Response	1270
7.33.3.1	Supported Negative Response Codes	1270
7.34	UDS – SID 23h : ReadMemoryByAddress service (Appl. Inc.)	1272
7.34.1	Part valid for Cboot SW	1272
7.34.2	Part valid for Application SW	1272
7.35	UDS – SID 3Dh : WriteMemoryByAddress service	1273
7.35.1	WriteMemoryByAddress request	1274
7.35.2	WriteMemoryByAddress positive response	1275
7.35.3	WriteMemoryByAddress negative response	1275
7.35.3.1	Supported Negative Response Codes	1275
7.36	UDS – SID 3Dh: WriteMemoryByAddress service (Appl. Inc.)	1278
7.36.1	Part valid for Application SW	1278


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation		Sign
	Engine Management System MSD87-6		
	Document Key	Pages	
	E150.035.49.01 SPE 000 28.0 (Draft)	18 of 10080	
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

7.36.2	Part valid for Cboot SW	1278
7.37	UDS – SID 34h: RequestDownload service	1279
7.37.1.1	RequestDownload request	1280
7.37.1.2	RequestDownload positive response	1280
7.37.1.3	RequestDownload negative response	1281
7.37.1.4	Supported Negative Response Codes	1281
7.38	UDS – SID 36h: TransferData service	1283
7.38.1.1	TransferData request for Download	1283
7.38.1.2	TransferData positive response for Download	1284
7.38.1.3	TransferData negative response for Download	1284
7.38.1.4	Supported Negative Response Codes	1285
7.39	UDS – SID 37h: RequestTransferExit service	1292
7.39.1.1	RequestTransferExit request	1292
7.39.1.2	RequestTransferExit positive response	1292
7.39.1.3	RequestTransferExit negative response	1292
7.39.1.4	Supported Negative Response Codes	1292
7.40	UDS – SID BCH: SiemensSpecificRequest service	1294
7.40.1.1	SiemensSpecificRequest definition	1295
7.40.1.2	SiemensSpecificRequest positive response	1295
7.40.1.3	SiemensSpecificRequest negative response	1295
7.40.1.4	Supported Negative Response Codes	1295
7.41	UDS – Service Interpreter (Appl.Inc.)	1298
7.42	UDS – Service Interpreter	1300
7.43	UDS – Basic communication Layer	1302
7.43.1	Timing parameters	1303
7.43.2	Request response handling.	1304
7.43.2.1	Request handling	1304
7.43.2.2	Response handling in the Service Scheduler	1304
7.43.3	Server Error handling in UDS basic communication layer	1305
7.43.4	Initialization	1305
7.44	UDS – Basic communication layer (Appl.Inc)	1306
7.44.1	Project Specific Initialization	1308

8	Driver request pedals determination	1309
8.1	AGGR DRRQ adaptation	1314
8.2	Determination of accelerator pedal value	1315
8.2.1	Filtration of the PVS-values	1316
8.2.2	Standardisation of the PVS-voltage value	1317
8.2.3	Value selection	1318
8.2.4	Driver progression correction	1321
8.2.5	Kick-Down-Recognition	1328

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
			Sign
		2008-02-27	SV P GS Sys ES
	Designation Engine Management System MSD87-6		
	Document Key E150.035.49.01 SPE 000 28.0 (Draft)	Pages 19 of 10080	
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

8.2.6	Selection of maximum pedal value	1329
8.2.7	Calculation of PV_AV gradient:	1331
8.3	Pedal value sensor diagnosis (PVS_x)	1332
8.3.1	Global PVS system error LV_ERR_PVS	1336
8.3.2	Diagnosis of sensor-supply voltage VCC_PVS_i	1337
8.3.3	PVS-synchronization control (RATIO-Check)	1338
8.3.4	Signal-Range-Check (High: SRCH / Low: SRCL)	1339
8.3.5	PVS – Double error	1341
8.3.6	Plausibility between PVS signal and brake detection	1341
8.4	Pedal value sensor limp home	1346
8.4.1	PVS limp-home limited dynamic 1	1348
8.4.2	PVS limp-home limited dynamic 2	1348
8.4.3	Determination of STATE_PVS_DIAG	1349

9 Driver request 1352


9.1	Pedal Value Interpretation	1355
9.1.1	FUNCTION DESCRIPTION:	1355
9.1.1.1	Initialisation	1356
9.1.1.2	Formula section	1357
9.2	Customer adaptation module DRRQ: Driver Request	1365
9.2.1	Outputs for BMW which are defined as DRRQ exported data	1365
9.2.2	Outputs for BMW which are not defined as DRRQ exported data	1366

10 Driveability 1367

10.1	Sequential fuel cut off and restart fuel feed	1370
10.1.1	Calculation of TQI_SP_SLOW dynamic	1371
10.1.2	NR_PAT_SEL_CYL calculation	1371
10.1.2.1	Calculation of \bar{T}_{OSC_DT} :	1371
10.1.2.2	Calculation of exit conditions for running sequences (CASE 2 and CASE 3)	1372
10.1.2.3	Transition from PU → PUC (CASE 1)	1372
10.1.2.4	Transition from PUC → IS or PUC → PU (CASE 2)	1373
10.1.2.5	Transition from PUC → PL (CASE 3)	1374
10.2	Customer adaptation module DRVB: Driveability	1377

11 ECU Process Monitoring 1378


11.1 ECM2 - Requirements to Infrastructure 1403

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation Engine Management System MSD87-6		
	Document Key E150.035.49.01 SPE 000 28.0 (Draft)		Pages 20 of 10080

general specification

11.2	Reset independant ETC- Limp Home	1407
11.3	General	1409
11.3.1	Basic Idea	1409
11.3.1.1	Function Level (VDA-name: Level 1)	1410
11.3.1.2	Process Monitoring Level (VDA-name: Level 2)	1410
11.3.1.3	Processor Monitoring Level (VDA-name: Level 3)	1410
11.3.2	Hardware Safety Module	1411
11.4	PROCESS MONITORING	1412
11.4.1	Task scheduler	1414
11.5	Debounce Mechanism	1415
11.6	Application Incidences and Configuration of Process Monitoring	1416
11.6.1	Initialization conditions	1418
11.6.2	Application incidences for the activation conditions of process monitoring	1419
11.6.3	Application incidences for monitoring of torque demand from idle speed controller	1420
11.6.3.1	Application incidences for monitoring driver request passive	1421
11.6.3.2	Application incidences for monitoring of idle speed setpoint	1421
11.6.3.2.1	Plausibilisation of basis idle-speed setpoint and external-influences	1423
11.6.3.2.2	Calculation of idle-speed setpoint model value	1424
11.6.3.3	Monitoring of Idle-speed controller activation conditions	1433
11.6.4	Application incidences for monitoring of pedal value signals	1437
11.6.5	Adaptation of OPM_AV to OPM_AV_MON	1439
11.6.5.1.1	SUBFUNCTION: INIT	1441
11.6.5.1.2	SUBFUNCTION: INIT1	1441
11.6.5.1.3	SUBFUNCTION: OPM	1441
11.6.5.1.4	SUBFUNCTION: OPM_AV_plaus	1442
11.6.6	Application incidences for the monitoring of torque losses	1443
11.6.6.1	Monitoring of torque losses for ACC	1445
11.6.6.2	Monitoring of torque losses for alternator	1446
11.6.6.3	Monitoring of torque losses for secondary air	1446
11.6.6.4	Calculation of the additionnal torque losses	1446
11.6.6.5	Calculation of the filtered additionnal torque losses	1447
11.6.7	Appl. Inc. for actual lambda deviation	1448
11.6.7.1	ECM2_DTSYSLADIF	1448
11.6.7.1.1	SUBFUNCTION: INIT	1448
11.6.7.1.2	SUBFUNCTION: determination_of_act_lamb_dev_value	1449
11.6.8	Forced injection shut-off for Level 2 - engine speed limitation	1450
11.6.9	State of torque intervention when level 2/3 error is detected	1452
11.6.10	Application incidences for "IPM-monitoring"	1453
11.6.11	Application incidences for "Monitoring of CAN signals"	1454
11.6.12	Application incidences for monitoring of minimum torque at clutch	1456
11.6.13	Application incidences for the actual efficiencies	1458
11.6.13.1	CONFIAPCPR	1458
11.6.13.1.1	SUBFUNCTION: INIT	1460
11.6.13.1.2	SUBFUNCTION: CONFIAPCPR	1460
11.6.14	Application incidences for the actual indicated engine torque	1461
11.6.14.1	CONFIAPCPR	1461
11.6.14.1.1	SUBFUNCTION: INIT	1462
11.6.14.1.2	SUBFUNCTION: CONFIAPCPR	1462
11.6.15	Sport switch monitoring	1463
11.6.15.1	Acquisition of sport-mode-switch for monitoring	1463


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation Engine Management System MSD87-6		
	Document Key	Pages	
E150.035.49.01 SPE 000 28.0 (Draft)	21 of 10080		
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

11.6.15.2	Low range detection (LV_RNG_L)	1464
11.6.15.3	Pedal value interpretation for monitoring	1467
11.6.15.4	Sport switch voltage range check monitoring diagnosis	1469
11.6.16	Driving off assistance	1470
11.6.17	Application incidences for desired indicated engine torque	1473
11.6.17.1	Calculation of PV_AV_AD_MON	1475
11.6.17.2	Calculation of external torque demand from TCT	1475
11.6.17.2.1	Integrated torque request monitoring	1475
11.6.17.2.2	Maximum request time monitoring	1476
11.6.17.2.3	Maximum torque request monitoring	1476
11.6.17.2.4	Inhibition of external torque demand from TCT	1476
11.6.17.3	Calculation of external torque demands	1477
11.6.17.4	Minimum indicated engine torque in trailing throttle with consideration of torque setpoint offset at engine start	1477
11.6.18	Application incidences for the combustion mode switch request	1478
11.6.19	Application incidences for actual fuel mass flow	1479
11.7	Monitoring of analogue to digital conversion	1482
11.8	Monitoring of coolant temperature	1487
11.8.1	FUNCTION PART: ECM2_DTSYSTCO	1488
11.9	Monitoring of torque demand from idle speed controller	1495
11.9.1	Monitoring of PD controller	1497
11.9.2	Monitoring of I controller	1505
11.10	Monitoring of torque losses	1513
11.10.1	Initialization	1516
11.10.2	Formula section	1516
11.10.2.1	Torque Loss calculation	1517
11.10.2.1.1	Torque Loss - Modeled	1518
11.10.2.1.2	Torque Loss detection flag	1518
11.10.3	Call Action	1519
11.10.3.1	Call order	1520
11.11	Monitoring of minimum torque at clutch	1521
11.11.1	FUNCTION PART: ECM2_DTSYSTQMIN	1522
11.12	Monitoring of maximum torque at clutch	1530
11.12.1	ECM2_DTSYSTQMAX	1530
11.13	Monitoring CAN-signals	1535
11.13.1	TCS monitoring	1542
11.13.1.1	TCS message monitoring	1542
11.13.1.2	TCS torque monitoring	1545
11.13.2	Vehicle speed monitoring	1547
11.13.2.1	Vehicle speed message monitoring	1547
11.13.2.2	Vehicle speed monitoring calculation	1550
11.13.3	DRIV_ASI monitoring	1551
11.13.3.1	DRIV_ASI message monitoring	1551
11.13.3.2	DRIV_ASI initialization monitoring	1554
11.13.3.3	DRIV_ASI torque monitoring	1555
11.13.3.4	DRIV_ASI Plausibility Monitoring	1557
11.13.4	GS monitoring	1559
11.13.4.1	GS message monitoring	1559


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation		Sign
	Engine Management System MSD87-6		
	Document Key	Pages	
	E150.035.49.01 SPE 000 28.0 (Draft)	22 of 10080	
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

11.13.4.2	GS torque monitoring	1563
11.13.5	BLS Plausibility Monitoring	1565
11.13.5.1	BLS message monitoring	1565
11.13.6	ICM Monitoring	1568
11.13.6.1	ICM message monitoring	1568
11.13.6.2	ICM torque monitoring	1571
11.14	Monitoring of engine speed	1574
11.14.1	FUNCTION PART: ECM2_DTSYSN	1575
11.15	Monitoring of pedal value signals(PVS)	1580
11.15.1	ECM2_DTSYSPVS	1581
11.15.1.1	SUBFUNCTION: Initialisation	1584
11.15.1.2	SUBFUNCTION: operate	1585
11.16	Monitoring of mass fuel flow (MFF_MON)	1594
11.16.1	ECM2_PLADGMFF0/INIT	1598
11.16.2	ECM2_PLADGMFF0/PLADGMFF0	1599
11.16.2.1	ECM2_PLADGMFF0/PLADGMFF0/MFF_MON_DIAGNOSIS	1600
11.16.2.2	ECM2_PLADGMFF0/PLADGMFF0/TPS_RATIO_CHECK	1601
11.17	Actual Lambda Deviation	1602
11.17.1	ECM2_DTSYSLADIF	1603
11.17.1.1	SUBFUNCTION: INIT	1605
11.17.1.2	ECM2_DTSYSLADIF/CLC_LAMB_MDL	1606
11.17.1.3	ECM2_DTSYSLADIF/CLC_LAMB_HOM_MDL	1607
11.17.1.4	ECM2_DTSYSLADIF/CLC_LAMB_S_MDL	1608
11.18	Monitoring of conditions for cruise control	1611
11.19	Torque Monitoring Overview	1612
11.20	Desired indicated engine torque	1613
11.20.1	ECM2_DTSYSTQISP	1613
11.21	Actual Fuel Mass Flow	1620
11.21.1	ECM2_DTSYSMFFAC	1621
11.21.1.1	SUBFUNCTION: INIT	1625
11.21.1.2	SUBFUNCTION: CLC_MFF_LAMB_REF_MON	1625
11.21.1.3	ECM2_DTSYSMFFAC/CLC_MFF_MON	1626
11.22	Actual efficiencies	1630
11.22.1	ECM2_DTSYSEFF/INIT	1634
11.22.2	ECM2_DTSYSEFF/DTSYSEFF	1635
11.22.2.1	ECM2_DTSYSEFF/DTSYSEFF/IGNITION_EFFICIENCY	1636
11.22.2.2	ECM2_DTSYSEFF/DTSYSEFF/LAMBDA_EFFICIENCY	1636
11.23	Actual indicated engine torque	1637
11.23.1	ECM2_DTSYSTQIAV	1637
11.23.1.1	SUBFUNCTION: INIT	1639
11.23.1.2	SUBFUNCTION: DTSYSTQIAV	1639
11.24	Monitoring of actual indicated engine torque	1640
11.24.1	DTSYSTQMON	1640
11.24.1.1	SUBFUNCTION: INIT	1642

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.


Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
		Designation	
		Engine Management System MSD87-6	
		Document Key	Pages
		E150.035.49.01 SPE 000 28.0 (Draft)	23 of 10080
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

11.24.1.2	SUBFUNCTION: DTSYSTQMON	1643
11.25	Combustion mode switch request	1644
11.25.1	ECM2_DTSYSCMB	1644
11.25.2	FUNCTION PART: ECM2_DTSYSCMB	1645
11.25.2.1	SUBFUNCTION: INIT	1645
11.25.2.2	SUBFUNCTION: CMB	1646
11.26	Monitoring of engine speed limitation	1647
11.26.1	FUNCTION PART: NLIM	1648
11.27	Processor monitoring by copy of process monitoring (level 2')	1651
11.27.1	ECM2_DTSYSCOPPRHPDI	1662
11.27.1.1	OPERATE	1667
11.28	Fault Reaction of Process Monitoring	1695
11.28.1.1	SUBFUNCTION: Initialisaton	1702
11.28.1.2	SUBFUNCTION: LV_ERR_MON	1703
11.29	Error memory management of process monitoring	1710
11.29.1	Error memory management of LV_ERR_CONV_MON_1	1714
11.29.2	Error memory management of LV_ERR_N_32_MON_1	1715
11.29.3	Error memory management of LV_ERR_TPS_MON_1	1715
11.29.4	Error memory management of LV_ERR_PVS_MON_1	1716
11.29.5	Error memory management of LV_ERR_CRU_INH_MON_1	1717
11.29.6	Error memory management of LV_ERR_TQI_AV_MON_1	1718
11.29.7	Error memory management of LV_ERR_TQI_N_MAX_MON_1	1719
11.29.8	Error memory management of LV_ERR_MFF_MON_1	1720
11.29.9	Error memory management of LV_ERR_TQ_DIF_ISC_MON_1	1721
11.29.10	Error memory management of LV_ERR_TQ_REQ_MON_1	1722
11.29.11	Error memory management of LV_ERR_TQ_EXT_MON_1	1723
11.29.12	Diagnosis for AFS request by monitoring (Diagnostic file – STD_INI filter)	1725
11.30	Error memory management of process monitoring (Appl.Inc.)	1728
11.30.1	Definition of Statusbytes	1729
11.30.2	Definition of non volatile ENVD for LV_ERR_TQI_N_MAX_MON_1	1730
11.30.3	List of error codes and symptoms	1733
11.31	Cus adap module: ECM2	1735
11.31.1	Outputs for BMW functions which are not defined as ECM2 exported data	1735
11.31.2	Outputs for SV functions which are defined as BMW exported data	1736

12 ECU Processor Monitoring 1737


12.1	ECM3 - MC requirements to infrastructure	1750
12.1.1	G44 Communication checksum monitoring	1755
12.1.2	G45 Parity-bit checking	1756
12.1.3	G48 Requirements to IRS actions for switch-off path check	1757
12.1.4	G53 Requirements to infrastructure interface for acquisition of values of A/D conversions on MC	1758
12.1.5	G61 Requirements to infrastructure interface for triggering a communication with the	

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
			Sign
		2008-02-27	SV P GS Sys ES
	Designation		
	Engine Management System MSD87-6		
		Document Key	Pages
		E150.035.49.01 SPE 000 28.0 (Draft)	24 of 10080
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification

	MU	1759
12.1.6	G46 Complement of configuration data	1759
12.1.7	G50 Requirements to infrastructure interface for stack check	1760
12.1.8	G58 Requirements to infrastructure interface for start of MU readiness check	1760
12.1.9	G59 Requirements to infrastructure interface for evaluation of MU readiness check	1761
12.1.10	Requirements to infrastructure interface for Standard ROM check on MC	1761
12.1.11	Requirements to infrastructure interface for Standard RAM check on MC	1762
12.2	ECU-selftest	1763
12.2.1	Flash test	1763
12.2.2	RAM test	1764
12.2.3	NVMY test	1766
12.3	Overview of Processor Monitoring	1768
12.3.1	System Overview	1768
12.3.2	States of the Components	1771
12.3.2.1	The INIT state	1772
12.3.2.2	The CONFIG state	1772
12.3.2.3	The PREDRIVE state	1773
12.3.2.4	The NORMAL state	1773
12.3.2.5	The DISABLE state	1773
12.3.3	Communication protocol between MC and MU	1773
12.3.3.1	CONFIG state communication	1773
12.3.3.2	PREDRIVE state communication	1774
12.3.3.3	NORMAL state communication	1775
12.3.3.4	DISABLE state communication	1776
12.3.4	Table of error codes of MC and MU	1776
12.4	MC Processor Monitoring	1779
12.4.1	State machine on MC	1783
12.4.2	Monitoring of state machine	1786
12.4.3	ROM checks of processor monitoring on MC	1787
12.4.3.1	Standard ROM check on MC	1788
12.4.3.2	Cyclic ROM check on MC for process monitoring	1789
12.4.4	RAM checks of processor monitoring on MC	1791
12.4.4.1	Standard RAM check on MC	1792
12.4.4.2	RAM check service actions of processor monitoring on MC	1792
12.4.4.3	Stack check service action of processor monitoring on MC	1795
12.4.5	Configuration of MU	1797
12.4.6	Version compatibility check	1798
12.4.7	Acquisition of values of A/D conversions	1799
12.4.8	Exchange of ignition key information between MC and MU	1801
12.5	MC Fault Reaction	1803
12.5.1	Central fault reaction	1811
12.5.2	Healing of reset counter and error information	1813
12.5.3	State of fault reaction and up-to-dateness of error code	1814
12.5.4	Transmission of error information from MC to MU	1815
12.5.5	Evaluation of error information from MU on MC	1816
12.5.6	Disable request by MU	1817
12.5.7	Disable request by external software	1818
12.5.8	Shutdown request by external software	1819
12.5.9	The redundant switch-off path	1820
12.5.10	Debounce mechanism	1821


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Sign	
		Designation	
		Engine Management System MSD87-6	
		Document Key	Pages
		E150.035.49.01 SPE 000 28.0 (Draft)	25 of 10080
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

general specification



12.5.11	Disabling of power stages	1823
12.5.12	Acquisition of under-/over-voltage flags	1827
12.6	MC Communication Monitoring between MC and MU	1828
12.6.1	Check of MU readiness	1829
12.6.2	Trigger CONFIG communication	1830
12.6.3	Communication monitoring in CONFIG state	1831
12.6.4	Trigger PREDRIVE communication	1833
12.6.5	Communication monitoring in PREDRIVE state	1834
12.6.6	Trigger NORMAL communication	1835
12.6.7	Communication monitoring in NORMAL state	1836
12.6.8	Trigger DISABLE communication	1838
12.6.9	Communication monitoring in DISABLE state	1838
12.7	MC Switch-Off Path Check	1841
12.8	MC Program Flow Monitoring	1849
12.8.1	Decoding of PFM byte sent by the MU used for monitoring of MU	1854
12.8.2	Decoding of PFM byte sent by the MU used for toggling by the PFM service actions	1856
12.8.3	PFM service actions	1857
12.8.4	Monitoring of timely updates of the synchronisation byte by the MU	1860
12.8.5	Test MU reaction to wrong PFM responses	1861
12.8.6	Post-processing of PFM response before communications	1864
12.9	MC Function-specific Instruction Set Test	1865
12.9.1	Pre-processing of the FS-IST data received from MU	1869
12.9.2	Test of MU reaction to wrong FS-IST answers	1871
12.9.3	Monitoring of FS-IST questions sent by MU	1874
12.9.4	Export of the question number to level 2'	1877
12.9.5	Export of the question number to level 2' (second calculation)	1878
12.9.6	Decoding of the result of the level 2' test calculation	1878
12.9.7	Decoding of the result of the level 2' test calculation (second calculation)	1879
12.9.8	Post-processing of the FS-IST data on MC for transmission to MU	1881
12.10	MC Error Memory Management of Processor Monitoring	1883
12.10.1	Update of error memory information with MU data	1886
12.10.1.1	Update of error memory information with MU data after CONFIG communication	1886
12.10.1.2	Update of error memory information with MU data after DISABLE communication	1888
12.10.2	Update of error memory information with MC data	1889
12.10.3	Activation of project-specific function calling the error memory management	1891
12.11	MC Processor Monitoring (Application Incidences)	1893
12.11.1	Generic configuration – Value assignment for configuration data	1896
12.11.2	Project-specific configuration – Value assignment for configuration data	1900
12.11.3	Project-specific configuration – Configuration of switch-off path check	1900
12.11.4	Project-specific configuration – Error memory service function	1902
12.11.5	Project-specific configuration – Initialisation of power stages after disabling by Processor Monitoring	1906
12.11.6	Project-specific configuration – Project-specific transition condition for the transition from INIT to CONFIG state	1906
12.11.7	Project-specific configuration – Acquisition of ignition key information on MC	1907
12.11.8	Project-specific configuration – Extension of power-latch phase for Standard ROM check	1908
12.11.9	Project-specific configuration – Handling of injection-off timer functionality	1909

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation		Sign
	Engine Management System MSD87-6		
	Document Key	Pages	
	E150.035.49.01 SPE 000 28.0 (Draft)	26 of 10080	
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	

13	ECU Memory	1911
13.1	Non volatile data	1923
13.1.1	READ Non-Volatile-Datas from the E2PROM	1927
13.1.2	WRITE Non-Volatile-Datas to the E2PROM	1928
13.1.3	INITIALIZE Non-Volatile-Datas	1928
13.1.4	Selective adaptation ranges	1929
13.2	Non Volatile Data Management – General Functionality	1942
13.2.1	Introduction	1942
13.2.2	Abbreviations and terms	1942
13.2.3	General description	1942
13.2.4	Hardware constraints	1943
13.2.5	NVMY system events	1943
13.2.6	Flight recorder on customer tool request	1944
13.3	Non Volatile Memory – Manager description	1945
13.3.1	NVMY Manager	1945
13.3.2	STATES description	1946
13.4	Non Volatile Data Management – Services Definition	1949
13.4.1	RESTORE service (BACKGROUND)	1949
13.4.1.1	Implementation	1949
13.4.2	CLEAR INIT request (BACKGROUND)	1949
13.4.2.1	Implementation	1949
13.4.3	READ service (BACKGROUND)	1949
13.4.3.1	Implementation	1950
13.4.4	READ FOR DIAG service (BACKGROUND)	1950
13.4.4.1	Implementation	1950
13.4.5	WRITE service (BACKGROUND)	1950
13.4.5.1	Implementation	1950
13.4.6	STORE service (BACKGROUND)	1951
13.4.6.1	Implementation	1951
13.4.7	SHUTDOWN service (BACKGROUND)	1951
13.4.7.1	Implementation	1951
13.4.8	NVMY coherency error services (BACKGROUND)	1952
13.4.8.1	Implementation	1952
13.5	Non Volatile Memory – Mechanisms for Data initialization	1953
13.5.1	Initialization in case of corrupted channel	1954
13.5.2	Initialization in case of NVMY coherency error	1954
13.5.3	Initialization in case of tuning request	1954
13.5.4	Initialization in case of "First power-on"	1955
13.5.5	Hard initialization	1955
13.6	Non Volatile Data Management, configuration	1956
13.6.1	Channel organisation	1956
13.6.2	Saving criteria	1957
13.9.1	NVMY data coherency	1958
13.9.2	Channel management	1959
13.9.2.1	STANDARD channel	1959

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.


Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
		Designation	
		Engine Management System MSD87-6	
		Document Key	
		E150.035.49.01 SPE 000 28.0 (Draft)	
		Pages	27 of 10080

general specification

13.11.1.1.1	Channel configuration	1960
13.11.1.1.2	MACROs description	1961
13.16.1.1	SPECIFIC channel	1963
13.19.1.1.1	Channel configuration	1964
13.19.1.1.2	MACROs description	1965
13.23.1	Tuning Initialisation	1968
13.23.1.1	Calibration description	1968
13.23.1.2	First Power On	1969
13.24	Aggregate ECME adaptation	1970
13.24.1	Outputs for BMW functions which are not defined as ECME exported data	1970

14	ECU Operation	1971
14.1	ECU Warm-reset detection (Appl. Inc.)	1976
14.1.1	Reset saved environment data	1978
14.1.2	Store project specific data at reset	1979
14.1.2.1	Action to store project specific data at warm reset	1980
14.1.3	Configuration of debug monitoring	1981
14.2	ECU Warm-reset detection, reset counter, debug-info	1982
14.2.1	Monitoring of Debug Informations from DBG-Driver	1988
14.2.2	Monitoring of Debug Informations from ECM3	1993
14.3	Requirements to Infrastructure Interface	1994
14.3.1	DBG – Acquisition of debug informations	1994
14.4	ECOP – Requirements to infrastructure interface	2005
14.5	ECU State Detection	2008
14.5.1	FUNCTION DESCRIPTION	2008
14.5.1.1	Initialization of Values at Reset	2009
14.5.1.2	Formula Section	2010
14.6	ECU Temperature	2017
14.6.1	ECU temperature TECU:	2018
14.6.1.1	ECU Temperature Calculations	2019
14.6.1.2	Monitoring of the ECU – Temperature	2022
14.7	ECU temperature sensor diagnosis (LV_ERR_TECU)	2029
14.7.1	FUNCTION DESCRIPTION:	2030
14.7.1.1	Initilisation	2031
14.7.1.2	Formula Section	2032
14.8	TECU over- temperatur detection (App. Inc.)	2036
14.8.1	TECU over- temperatur detection	2036
14.9	ECU Warm-reset diagnosis	2038
14.9.1	Handling of ECU-Reset detection in error management	2038

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.



Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
			Sign
		2008-02-27	SV P GS Sys ES
	Designation Engine Management System MSD87-6		
	Document Key	Pages	
E150.035.49.01 SPE 000 28.0 (Draft)	28 of 10080		
Regensburg(RBG)	Copyright (C) Continental AG 2008		A4 : 2004-06

general specification

15	ECU Reprogramming	2043
15.1	ECU reprogramming, general functionality	2046
15.1.1	Introduction	2046
15.1.2	General description	2046
15.1.3	Communication between reprogramming Tool and ECU	2048
15.1.4	Functional memory layout	2049
15.1.4.1	Boot-SW	2050
15.1.4.2	ECU-SW	2051
15.1.4.3	Calibration data	2051
15.1.5	Security mechanisms	2052
15.1.5.1	Security Access	2052
15.1.5.2	Reprogramming Keys in RAM	2053
15.1.5.3	Checksum calculation	2053
15.1.5.4	Coherence System	2053
15.1.5.5	Security Keys in flash memory	2053
15.1.5.6	Reprogramming session status	2053
15.1.6	Reprogramming procedure activation	2054
15.1.7	Reprogramming states	2056
15.1.7.1	State "Init"	2056
15.1.7.2	State "Delete"	2056
15.1.7.3	State "Start"	2057
15.1.7.4	State "Continue"	2057
15.1.7.5	State "Exit"	2057
15.1.7.6	State "Check"	2057
15.1.7.7	State "Reset"	2057
15.1.8	Reprogramming Status Word definition	2058
15.2	NRV2b Stream Decompression (Appl. Inc.)	2067
Note:	2068	
15.3	Flash reprogramming (BN2020, UDS on FlexRay)	2069
15.3.1	The message flow of flash-reprogramming with E-Sys Tool (customer reprog.)	2069

16	Exhaust gas composition	2072
16.1	EGCP Configuration Data	2115
16.1.1	Global configuration data	2115
16.1.2	Local configuration data	2115
16.2	EGCP - Requirements to Infrastructure Interface	2117
16.2.1	Control of the up- and downstream LSH Driver	2122
16.2.2	Exhaust gas composition – Requirements for up- and downstream lambda sensor voltage	2122
16.2.3	Signal acquisition for cylinder individual lambda control (CILC)	2123
16.2.4	Upstream oxygen sensor heater OBDI diagnosis	2125
16.2.5	Wide Range Air-Fuel sensor interface (BSW)	2126
16.2.6	Up and downstream oxygen sensor internal resistance determination.	2128
16.2.7	Acquisition of signal voltage and lambda model values for the Heater Coupling Diagnosis	2129


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter	Baseline		
Contents of All Chapters	9SN2450S		
Designed by	Date	Department	Sign
André Kühnle	2008-02-27	SV P GS Sys ES	
Released by	Date	Department	
André Kühnle	2008-02-27	SV P GS Sys ES	
	Designation		
	Engine Management System MSD87-6		
	Document Key		Pages
	E150.035.49.01 SPE 000 28.0 (Draft)		29 of 10080
Regensburg(RBG)	Copyright (C) Continental AG 2008		A4 : 2004-06

general specification

16.3	EGCP – Configuration of Infrastructure Interface	2130
16.4	Wide Range Air-Fuel sensor interface (BSW) for the ATIC42	2140
16.4.1	Acquire raw data from the Infrastructure (BSW)	2140
16.4.2	Description of the interaction between infrastructure and the WRAF controller	2142
16.4.3	BSW Description	2143
16.4.3.1	SPI command sequencing	2143
16.4.3.2	Deactivation of WRAFsensor	2144
16.4.3.3	Reading the identification registers (currently not implemented in generic SW!)	2144
16.4.3.4	Reading the diagnostic registers	2144
16.4.3.5	Writing to the initialisation register (WR_INIT)	2146
16.4.3.6	Performing a SW reset at the ATIC42 IC (currently not implemented in generic SW!)	2148
16.5	Exhaust gas composition – Requirements to I/O BSW	2153
16.6	Acquisition of signal voltage and lambda model values for the Heater Coupling Diagnosis with UEGO Sensors and ATIC42	2158
16.7	Signal acquisition for cylinder individual lambda control	2161
16.8	AGGR EGCP adaptation	2165
16.9	Wide Range Air-Fuel Sensor Interface BSW-ASW for the ATIC42	2169
16.9.1	Application incidences for the ATIC42 ASW-BSW interface	2174
16.10	Oxygen sensor ceramic temperature	2176
16.10.1	Application specific conditions for oxygen sensor ceramic temperature	2198
16.11	Oxygen Sensor Signal Processing Upstream	2200
16.11.1	EGCP_SIGCVLSL3	2201
16.11.1.1	SUBFUNCTION: operate	2204
16.11.1.2	SUBFUNCTION: reset	2221
16.12	Downstream oxygen sensor internal resistance determination	2223
16.13	Application specific conditions for oxygen sensor internal resistance	2240
16.14	Signal acquisition and compensation of WRAF sensor	2241
16.14.1	Compensation of WRAF controller electrical offset voltage and system gain error	2248
16.14.1.1	Conditions for offset adjustment directly after engine start	2248
16.14.1.2	Conditions for offset adjustment during normal engine operation	2249
16.14.1.3	Offset calculation	2251
16.14.1.3.1	Measurement acquisition	2255
16.14.1.3.2	Offset adjustment High Gain	2256
16.14.1.3.3	Offset adjustment Low Gain	2257
16.14.2	Signal acquisition and conversion for WRAF sensor	2258
16.14.2.1	WRAF sensor interface gain-switching for I _p measurement	2259
16.14.2.2	Calculation of compensated WRAF controller output voltage and WRAF sensor pumping current	2260
16.14.2.3	Conversion into lambda signal	2262
16.15	Application Incidences for ‘Offset adjustment of oxygen sensor (linear control)’	2267
16.16	Operability detection for the linear lambda sensor	2269
16.16.1	FUNCTION DESCRIPTION	2270
16.16.1.1	INITIALIZATION	2275

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Chapter		Baseline	
Contents of All Chapters		9SN2450S	
Designed by	André Kühnle	Date	2008-02-27
Released by	André Kühnle	Department	SV P GS Sys ES
		Date	2008-02-27
		Department	SV P GS Sys ES
	Designation Engine Management System MSD87-6		
	Document Key	Pages	
E150.035.49.01 SPE 000 28.0 (Draft)	30 of 10080		
Regensburg(RBG)		Copyright (C) Continental AG 2008	
		A4 : 2004-06	